














AREAS OF APPLICATION

-  General illumination
-  Spotlighting for shop windows, displays
-  Retail, Shopping Mall and Hospital

PRODUCT BENEFITS

-  Suitable for use in areas with low ceilings thanks to compact design
-  Creates a gentle, natural light, ensuring visual comfort
-  Affordable solution for retrofit or new installations
-  Very homogenous light and Energy savings up to 50 % (compared to CFL lamps)
-  Integrated PMMA front material and aluminum housing for good heat dissipation

PRODUCT FEATURES

-  Type of protection: IP20
-  Long lifetime: up to 35,000 h
-  Colour Rendering Index R:80

TECHNICAL DATA

Electrical data

Rated power	6.5W
Operating voltage	AC190-265V
Operating frequency	50/60Hz
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	559±5%lm
Color rendering index Ra	80

Light Technical Data

Beam angle	38°
------------	-----

Dimensions

Inner Diameter	Ø94mm
Height	75mm

Temperature & operating conditions

Ambient Temperature	-15° ~ +60°
---------------------	-------------


General information

Mounting type	Ceiling Recessed
LED type	COB LED
Lifespan	35,000h



SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLXG2-6.5W	86lm/W	6.5W	20	NO

TECHNICAL DRAWING

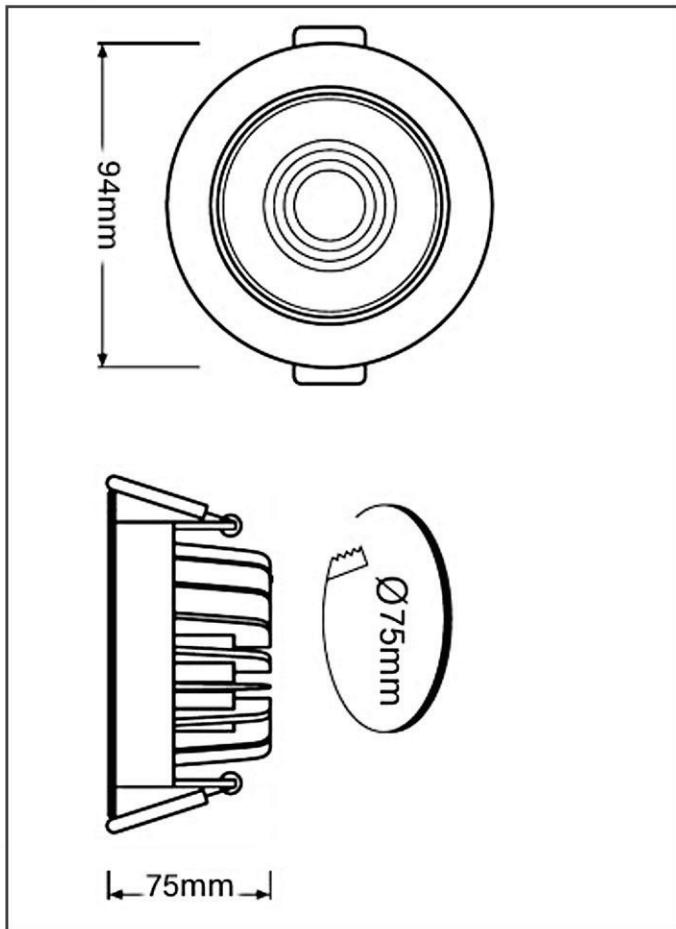

PHOTOMETRIC CURVE

