














AREAS OF APPLICATION

-  General illumination
-  Living Room, offices, conference rooms
-  Direct replacement for compact fluorescent lamp downlights

PRODUCT BENEFITS

-  Low flicker light thanks to special electronic control gear
-  Exceptionally stable CRI across all colour temperature
-  Elegant design with Anti-glare lens and exclusive design
-  Very homogenous light and Energy savings up to 50 % (compared to CFL lamps)
-  Integrated PMMA front material and aluminum housing for good heat dissipation

PRODUCT FEATURES

-  Type of protection: IP20
-  Heat Sink: Aluminium Alloy
-  3 Years Warranty

TECHNICAL DATA

Electrical data

Rated power	6.5W
Operating voltage	AC100-250V
Operating frequency	50/60Hz
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	535±5%lm
Color rendering index Ra	80

Light Technical Data

Beam angle	38°
------------	-----

Dimensions

Inner Diameter	Ø94mm
Height	75mm

Temperature & operating conditions


Ambient Temperature	-15°~ +60°
---------------------	------------

General information

Mounting type	Ceiling Recessed
LED type	LED COB
Lifespan	35,000h

SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLXG6-6.5W	82.5lm/W	6.5W	20	NO

TECHNICAL DRAWING

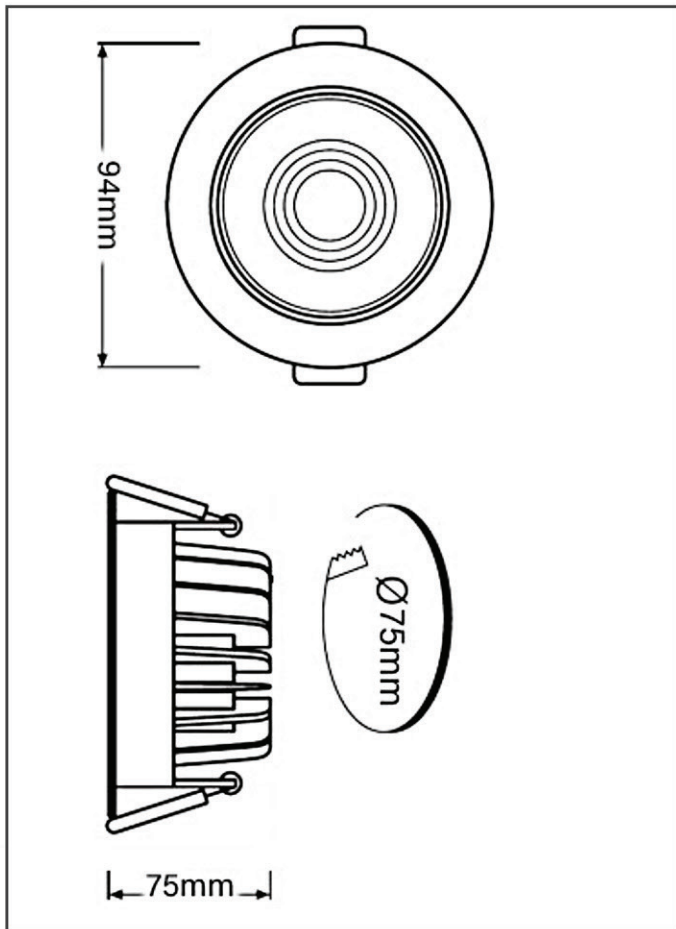

PHOTOMETRIC CURVE

