













AREAS OF APPLICATION

-  Art galleries ,Residential interiors
-  Living Room, offices, conference rooms
-  Retail,Shopping Mall and Hospital

PRODUCT BENEFITS

-  High lumen output from very compact, low-height luminaire
-  Exceptionally stable CRI across all colour ratings
-  Elegant design with dimmable lighting makes it easy to adjust the light intensity
-  Very homogenous light and Energy savings up to 50 % (compared to CFL lamps)
-  Integrated PMMA lens with aluminum housing for good heat dissipation

PRODUCT FEATURES

-  Type of protection: IP20
-  Heat Sink:Aluminium Alloy
-  High efficiency: up to 88lm/W

TECHNICAL DATA

Electrical data

Rated power	6.5W
Operating voltage	AC180-250V
Operating frequency	50/60Hz
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	570±5%lm
Color rendering index Ra	80

Light Technical Data

Beam angle	38°
------------	-----

Dimensions

Inner Diameter	Ø94mm
Height	31mm

Temperature & operating conditions

Ambient Temperature	-15°~ +50°
---------------------	------------


General information

Mounting type	Ceiling Recessed
LED type	LED COB
Lifespan	35,000h



SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLXQ3X 6.5W	88lm/W	6.5W	20	YES

TECHNICAL DRAWING

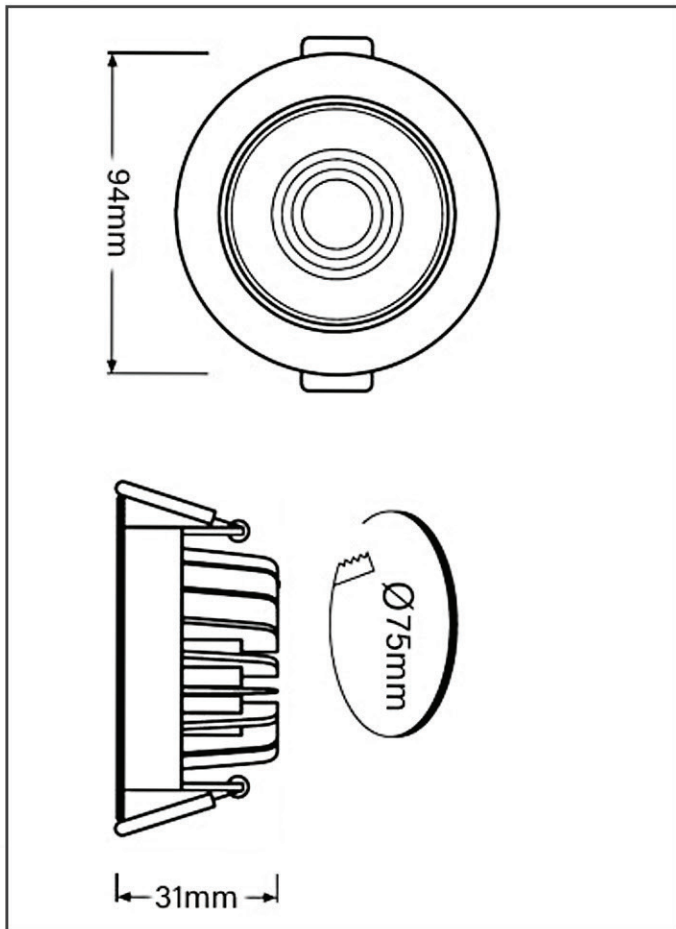

PHOTOMETRIC CURVE

