



AREAS OF APPLICATION

- General illumination
- Living Room, offices, conference rooms
- Direct replacement for compact fluorescent lamp downlights

PRODUCT BENEFITS

- Robust housing and front ring made of high grade aluminum
- External driver for reduced overall height for use also in low suspended ceilings
- Elegant design with Anti-glare lens and exclusive design
- Creates a gentle, natural light, ensuring visual comfort
- Integrated PMMA front material and aluminum housing for good heat dissipation

PRODUCT FEATURES

- Type of protection: IP20
- Heat Sink: Aluminium Alloy
- 3 Years Warranty

TECHNICAL DATA

Electrical data

Rated power	6.5W
Operating voltage	AC100-250V
Operating frequency	50/60Hz
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	510±5%lm
Color rendering index Ra	80

Light Technical Data

Beam angle	38°
------------	-----

Dimensions

Inner Diameter	Ø94mm
Height	49mm

Temperature & operating conditions

Ambient Temperature	-15°~ +60°
---------------------	------------


General information

Mounting type	Ceiling Recessed
LED type	LED COB
Lifespan	35,000h



SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLXQ4X 6.5W	79lm/W	6.5W	20	NO

TECHNICAL DRAWING

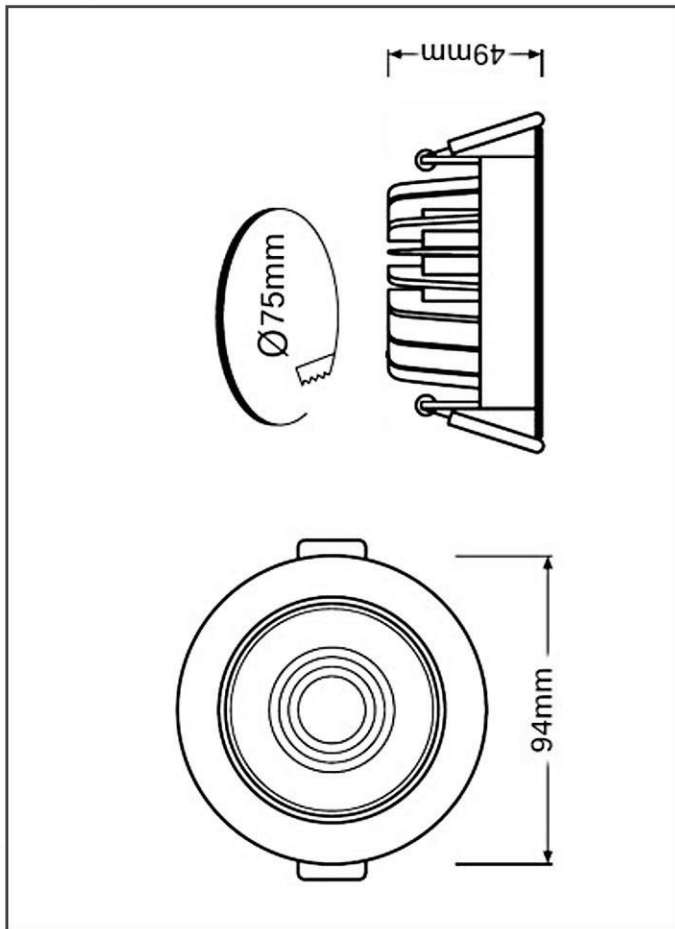

PHOTOMETRIC CURVE

