

AREAS OF APPLICATION

- Parking Lots ,Retail
- Gas stations and Storage areas.
- Manufacturing assembly,Distribution and warehouse

PRODUCT BENEFITS

- Highly efficient up to 130lm/w and No gaps or seams between the fixtures
- Can be linkable for continuous line
- The massive aluminum housing with 1.3 mm thickness provides stability and excellent heat dissipation abilities
- UV Stabilised prismatic diffuser for uniform light distribution and high efficiency.
- High quality LED driver,flicker free driver and Stainless steel surface mounting clamps.

PRODUCT FEATURES

- Type of protection: IP54
- 5 Years Warranty.
- Energy efficiency class:A++

TECHNICAL DATA

Electrical data

Rated power	40W
Operating voltage	AC100-277V
Operating frequency	47-63HZ
Power factor	0.90

Photometrical data

Color temperature	2700-6500K
Luminous flux	5200±400lm
Color rendering index Ra	>80

Light Technical Data

Beam angle	120°
------------	------

Dimensions

Length	1198mm
Width	75mm

Temperature & operating conditions

Ambient Temperature	-30~+50°C
---------------------	-----------



General information

Mounting type	Surface Mount
LED type	CREE LED
Lifespan	50,000h



SPECIFICATION				
MODEL	LUMINOUS EFFICIENCY	POWER	IP RATING	DIMMABLE
CLX T201-40W12	130±10lm/W	40W	54	Yes

TECHNICAL DRAWING

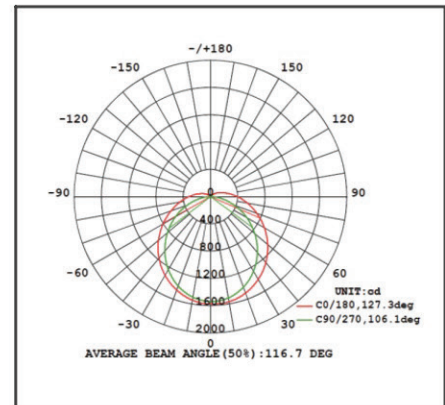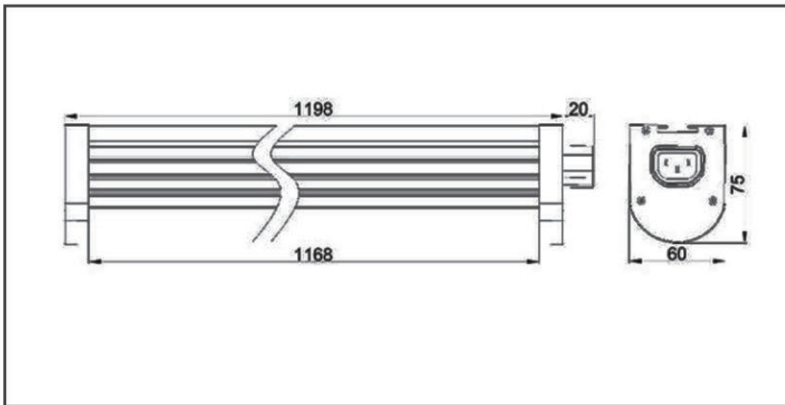

The massive aluminum housing with 1.3 mm thickness provides stability and excellent heat dissipation abilities

Reliable and stable mounting system for a safe and easy installation. The stainless steel hanging rope accessories(30KG weight capacity) are corrosion and aging resistant

The end-caps are designed to allow for an fast and easy installation for single use or in ancontinuous-run-installation without gaps

The build-in driver is wrapped in an insulating plastic casing providing better dielectric strength ratings

Aluminum PCB containing the SMD LED chips

The break-resistant polycarbonate cover provides a perfect homogeneous light distribution

